

# da Vinci Jr. 1.0

## Open Filament Project




**XYZ** PRINTING

# Step1 Software Installation : XYZprint R2 Beta 2.0.23

XYZprint R2 Beta 2.0.23 :

Donload link:



<https://drive.google.com/file/d/1gkGi8caiwpy1JHkeMBFeuvQse9-qSgwM/view?usp=sharing>

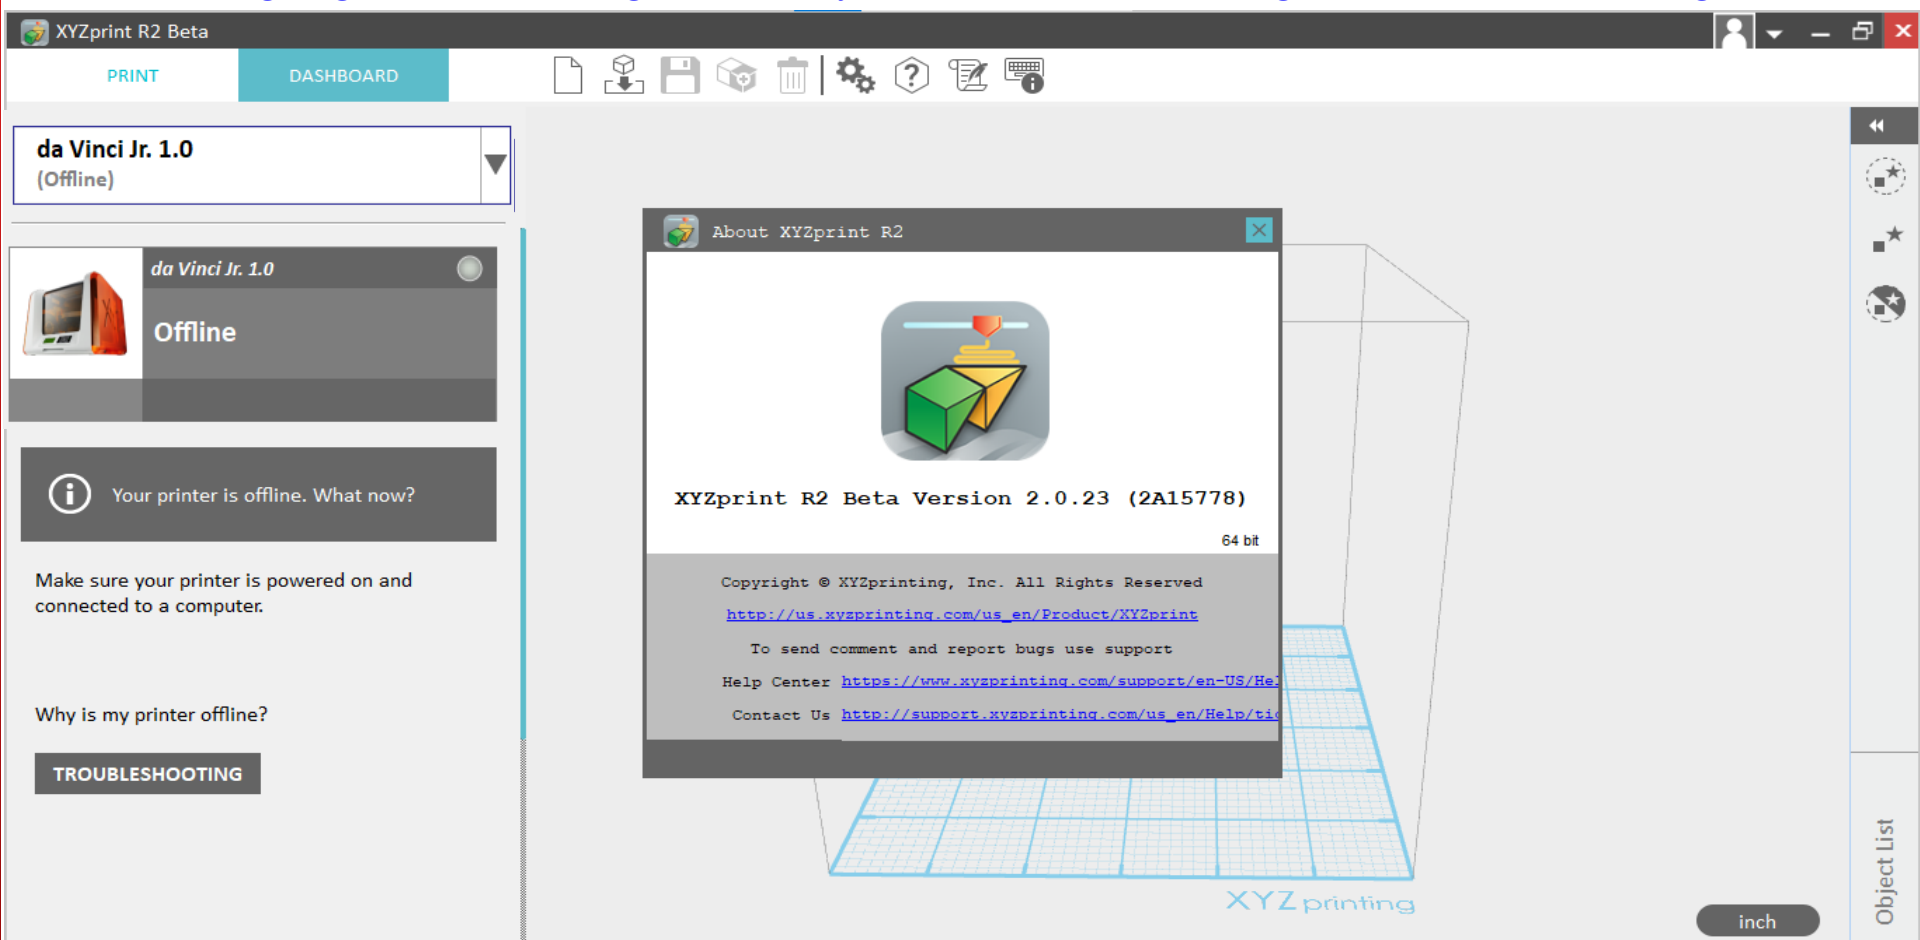

# Step2 Upgrade firmware

Launch the software and upgrade the firmware to 3.5.1 version.  
After the update is completed, the printer will automatically reboot.  
\*Update time is about 5~10 minutes, please wait patiently.

\* Notice  
Check does the machine automatically restart when the FW upgrade done.

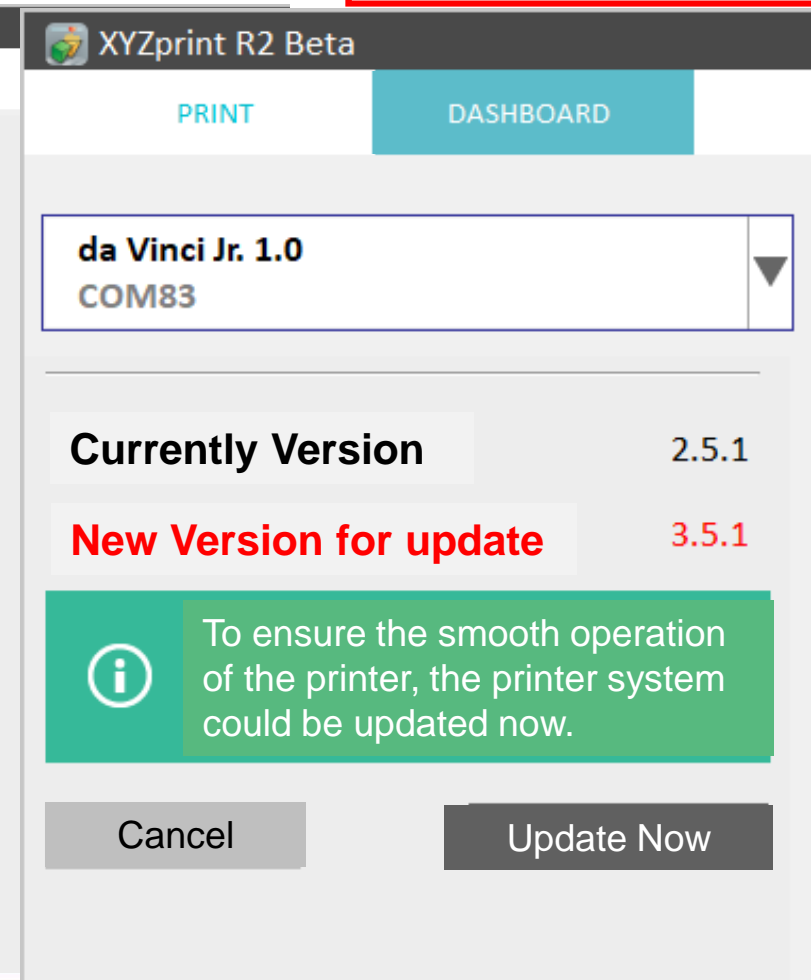
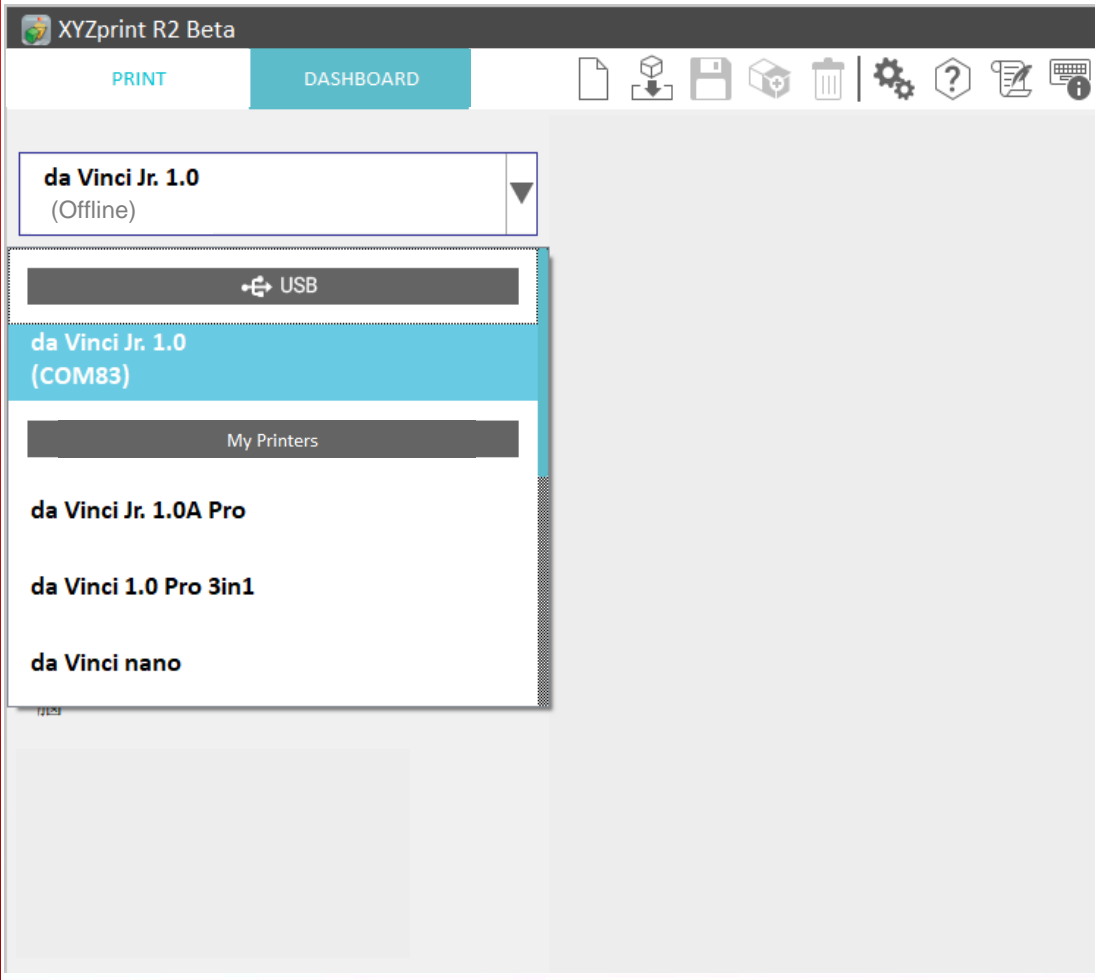


# Step3 Filament Chip Confirm

Click the "Filament" in Dashboard and confirm printer serial number is complete in total of 18 digits.

If the status as figure 1, proceed to Step 4 to serial number upgrade tool.

If the status is shown in Figure 2, it's done and you could start using 3rd party filament.

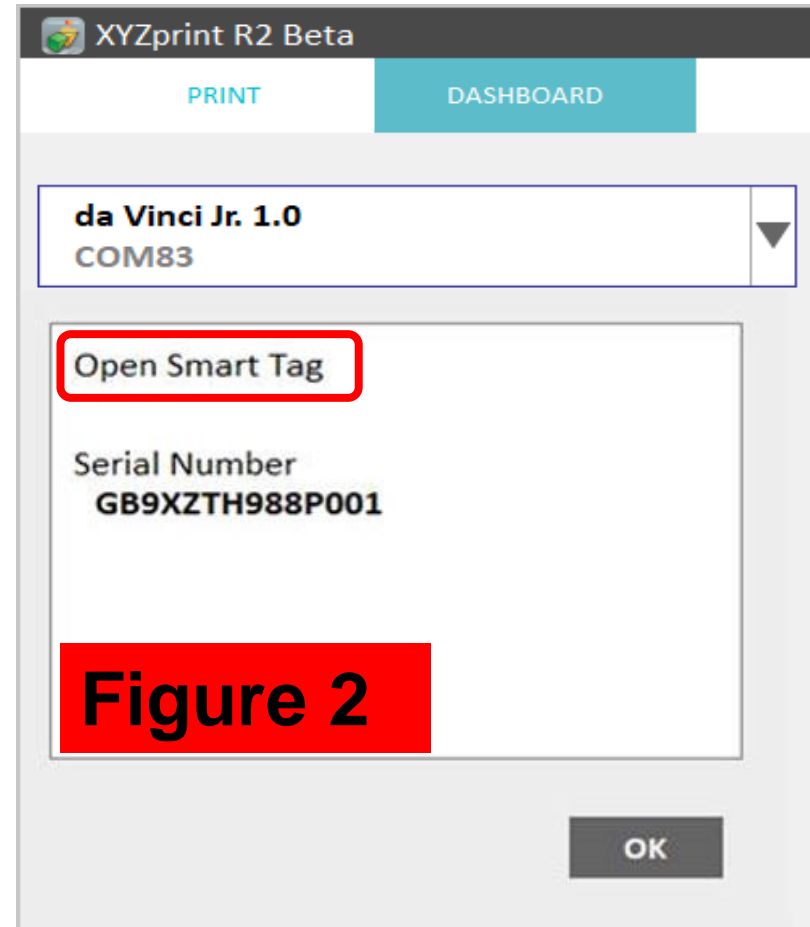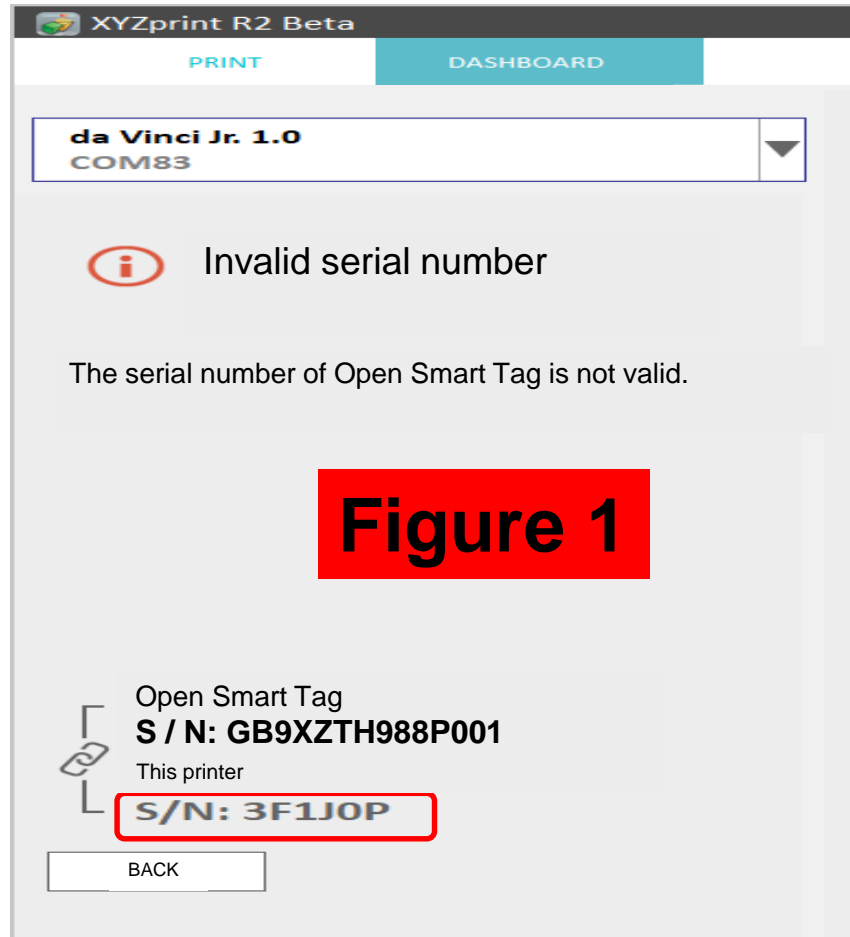

# Step4 Serial number upgrade Tool



## Operation method

Download link:

[https://drive.google.com/file/d/1QYc3ibsXmN4ttcUcJF4XLpPP\\_Q\\_sDgq1/view?usp=drive\\_link](https://drive.google.com/file/d/1QYc3ibsXmN4ttcUcJF4XLpPP_Q_sDgq1/view?usp=drive_link)

1. Download and Unzip the program.
2. Execute "PrinterSNUpdateApply.exe" program.
3. Select "Printer Name" and fill in "printer serial number, total 18 digits".
4. Click "Apply and Generate Tool" to generate zip file.




The naming rule of the Zip file is "Printer Serial Number ". zip

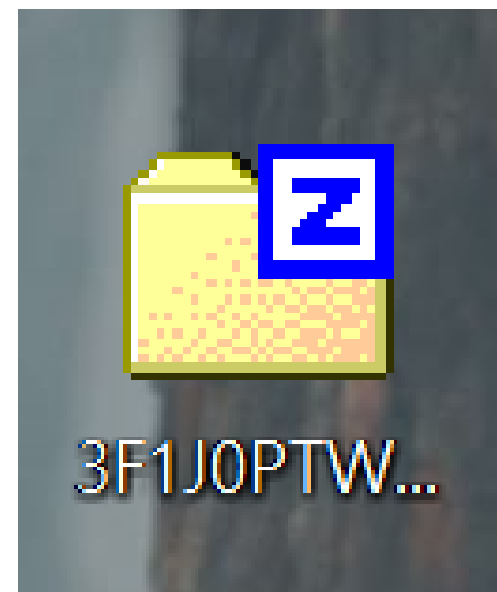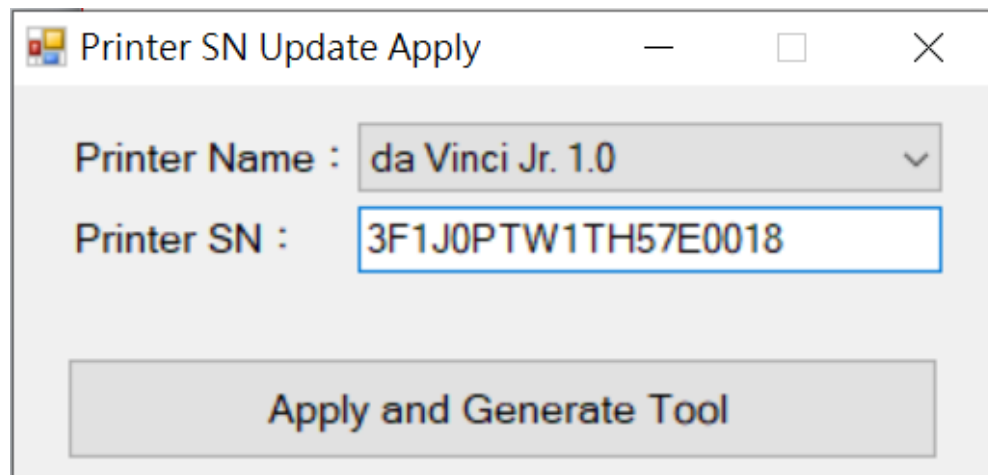

# Step4 Serial number upgrade Tool

## Operation method

5. Unzip the zip file.
6. Connect the printer via USB cable.
7. Execute "PrinterSNUpdateTool.exe"
8. Confirm the Serial Port then click Connect button.
9. Click "Update" button for printer serial number renew.

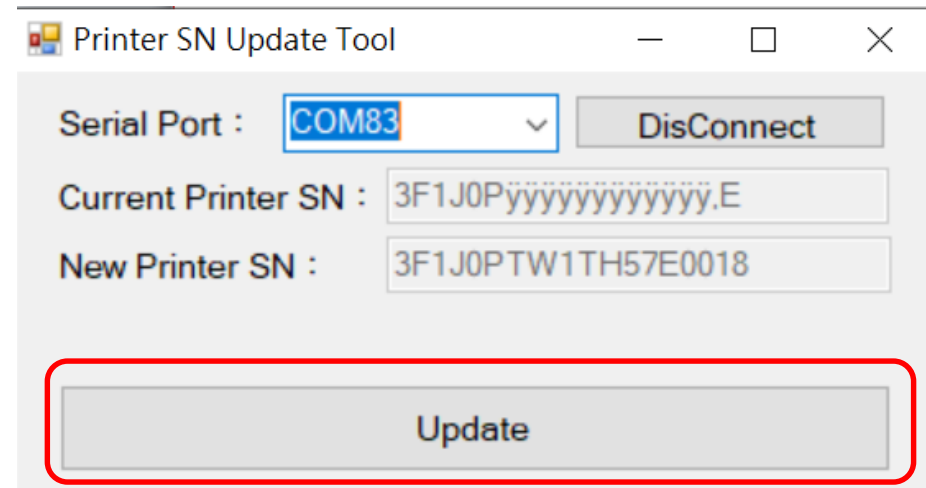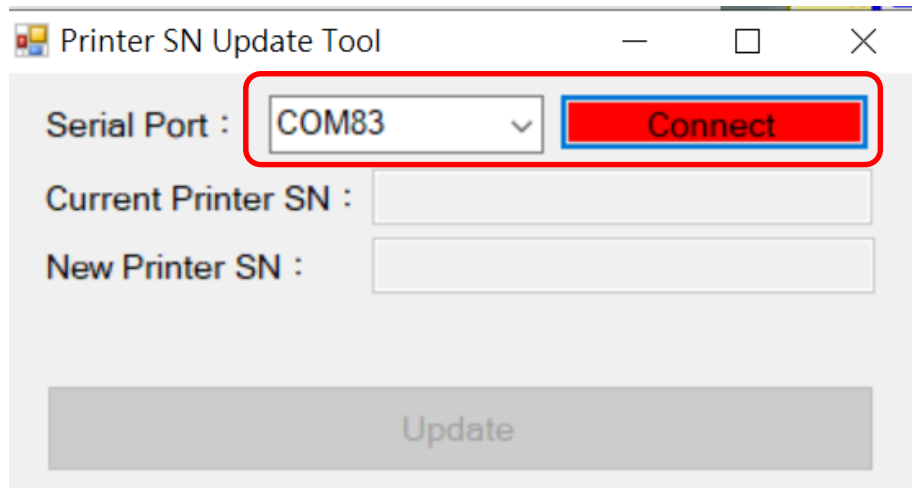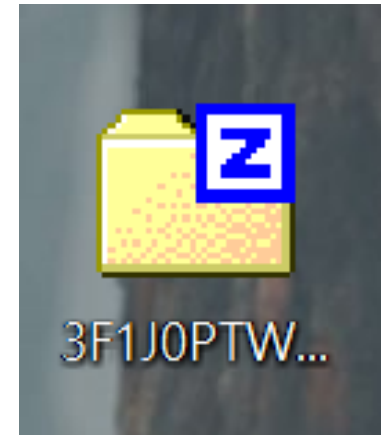


# Step4 Serial number upgrade Tool

## Operation method

10. Current Printer SN will be refreshed immediately if updated successfully.

And it's shows "Update Successful!" as photo.

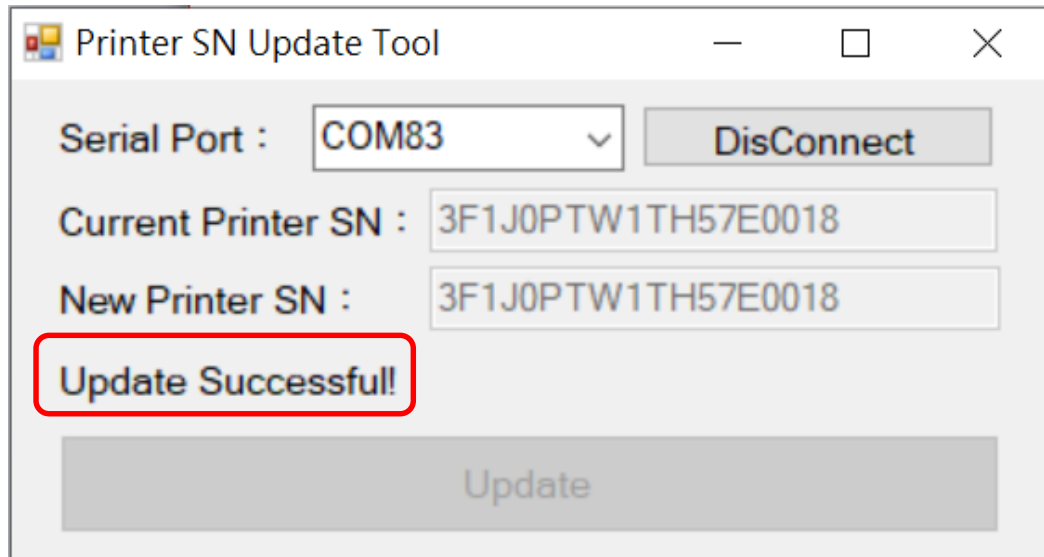


## Verification rule:

1. If the serial number is less than 18 digits, update is not allowed.
2. If the printer model and the updated serial number model are not matched, the update won't be continue.
3. The customer update tool is only allowed to update the serial number once.  
If you want to update again, you need use the apply tool to regenerate the update tool again.

# Step5 Filament Status Confirm

Click "Filament" and confirm that the status is "Open Smart Tag"

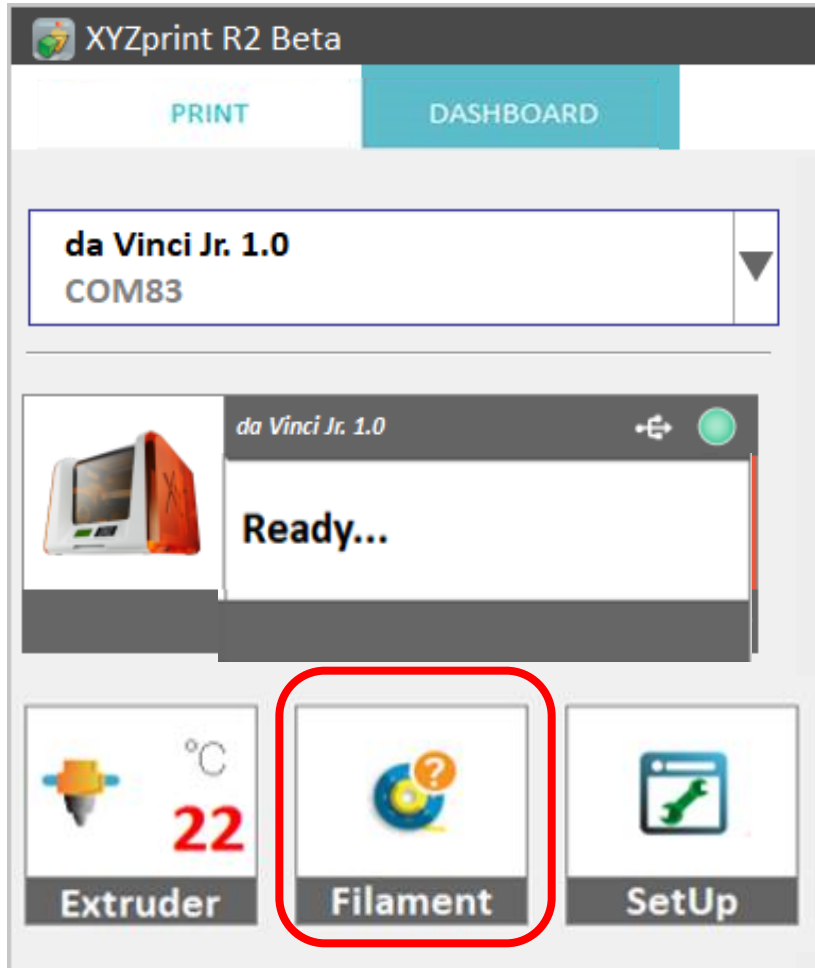



**THANK YOU**

The background is a solid red color. Overlaid on this are several large, dark red, curved shapes that sweep across the frame from the bottom left towards the top right. These shapes are layered, creating a sense of depth and movement. The overall aesthetic is modern and minimalist.